

NuTherm HC-30

Technical Data Sheet

NuTherm HC-30

High performance, Potassium Formate/Water-based closed system heat transfer fluid ideal for low temperature applications

Description:

NuTherm HC-30 is a high performance heat transfer fluid designed as an alternative to less effective glycol, PAG, and Calcium Chloride closed system fluids. **NuTherm HC-30** is non-toxic, non-flammable, and has a robust corrosion inhibition package making it ideal for use in closed systems down to -30°C (-22°F) and up to 218°C (425°F).

NuTherm HC-30 has superior thermophysical properties in comparison to traditional closed system heat transfer fluids, including higher thermal conductivity and specific heat, as well as lower viscosity, making it an extraordinarily more efficient closed system coolant within its operational temperature range.

NuTherm HC-30 is non-hazardous, biodegradable, CFC-free, antimicrobial, and has exceptional thermal stability at high temperatures in comparison to glycols, PAG's, Calcium Chloride, Trichloroethylene and Methylene Chloride (Dichloromethane) making it an intelligent alternative. **NuTherm HC-30** is formulated with an incredibly robust and efficient corrosion inhibition package, allowing the product to be used on most metals including Stainless Steel, Carbon Steel, Cast Steel, Copper and its alloys (Brass & Bronze), Monel, Nickel, Hastelloy, Inconel, Tantalum, Titanium, Titanium alloys (Ti6Al4V), Aluminium and Cast Iron. Do not use on Zinc, Zinc-plated or galvanized metals, Magnesium. **NuTherm HC-30** corrosion tests at 80°C show incredible results of x mmpy (x mpy) on C260 Brass alloys, x mmpy (x mpy) on 304L Stainless Steel, and x mmpy (x mpy) on AL1100 Aluminium. **NuTherm HC-30 does not produce pitting corrosion on Aluminium alloys like other Potassium Formate open bath heat transfer fluids.**



*mmpy = millimeters per year; mpy = mils per year (1 mil = 0.001 inch); In general, uniform corrosion rates less than 2 mpy are acceptable for most applications. Corrosion rates between 2 and 10 mpy are considered marginal and may impact useful life of equipment. Corrosion rates greater than 10 mpy per year are unacceptable.



Product Benefits

- High thermal conductivity
- High specific heat
- Low viscosity
- Non-toxic, non-flammable
- High metal compatibility
- Biodegradable
- Environmentally friendly (CFC-free)
- Robust corrosion inhibition
- Economical
- Pre-mixed solutions

NuTherm HC-30 Physical Properties

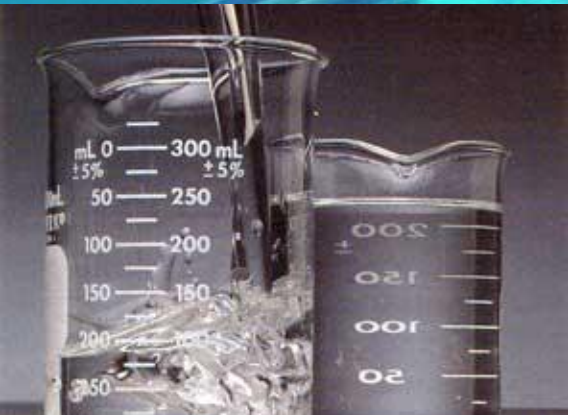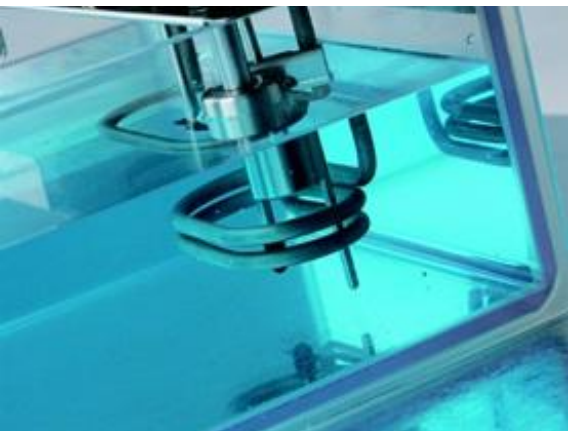

NuTherm HC-30

BULK DENSITY	10.64 #/gal
SPECIFIC GRAVITY @ 20 °C	1.275 g/cm ³
TEMPERATURE RANGE (CLOSED SYSTEM)	-30 to 218°C (-22 to 425°F)
THERMAL STABILITY	HIGH
ODOR	ODORLESS
FLASH POINT (°C)	NONE
FIRE POINT (°C)	NONE
MELTING POINT / FREEZING POINT	-40°C (-40°F)
BOILING POINT	112°C (234°F)
pH	8.0 to 8.5
APPEARANCE and COLOR	CLEAR, COLORLESS to AMBER

Availability: 5-gallon pails, 55-gallon drums, 275-gallon tote-bins, and bulk tankers.

Shipment: Non-Hazardous for transport via DOT, IMDG, and IATA.

Storage: Keep out of direct sunlight. Keep from freezing. Store between 4 to 38°F (40-100°F).

Disposal: Dispose of in accordance with local, state, and federal regulations.

**1155 Park Avenue
Emeryville, CA 94608**

(888) 99-NuGen
(888) 996-8436
Fax (707) 891-3012

www.NuGenTec.com
Oilfield@NuGenTec.com

EMERGENCY OVERVIEW:

This product may cause serious irritation to the eyes.

SAFETY:

Please make sure you have read and understand the product label and SDS before using this product. Use proper chemical hygiene when handling product. Wash thoroughly after handling. Observe label precautions. This product is classified and labeled according to the Globally Harmonized System (GHS).

NuTherm HC-30 Properties



Temperature (°F)	Viscosity (cPs)	Thermal Conductivity (BTU/hr•ft•°F)	Specific Heat (BTU/lb•°F)	Density (lb/ft ³)
-22	6.99	0.276	0.708	81.0
-20	6.80	0.276	0.708	81.0
0	5.30	0.283	0.714	80.6
20	4.20	0.289	0.721	80.3
40	3.40	0.296	0.727	79.9
60	2.70	0.302	0.733	79.6
80	2.30	0.309	0.739	79.2
100	1.90	0.316	0.745	78.9
120	1.60	0.322	0.751	78.5
140	1.40	0.329	0.757	78.2
160	1.20	0.335	0.763	77.8
180	1.10	0.342	0.770	77.5
200	0.95	0.348	0.776	77.1
220	0.85	0.355	0.782	76.8
240	0.76	0.361	0.788	76.4
260	0.69	0.368	0.794	76.0
280	0.62	0.374	0.800	75.7
300	0.57	0.381	0.806	75.3
320	0.52	0.387	0.812	75.0
340	0.48	0.394	0.819	74.6
360	0.44	0.400	0.825	74.3
380	0.41	0.407	0.831	73.9
400	0.38	0.414	0.837	73.6
420	0.36	0.420	0.843	73.2
425	0.35	0.422	0.845	73.1

Temperature (°C)	Viscosity (mPa•s)	Thermal Conductivity (W/m•K)	Specific Heat (kJ/kg•K)	Density (kg/m ³)
-30	7.00	0.469	2.961	1300
-20	5.50	0.479	2.984	1295
-10	4.50	0.489	3.007	1290
0	3.70	0.499	3.031	1285
10	3.00	0.509	3.054	1280
20	2.50	0.519	3.077	1275
30	2.20	0.529	3.100	1270
40	1.90	0.539	3.123	1265
50	1.60	0.549	3.146	1260
60	1.40	0.559	3.136	1255
70	1.30	0.569	3.192	1250
80	1.10	0.579	3.215	1244
90	0.99	0.589	3.238	1239
100	0.89	0.599	3.262	1234
110	0.80	0.609	3.285	1229
120	0.73	0.619	3.308	1224
130	0.67	0.629	3.331	1219
140	0.61	0.639	3.354	1214
150	0.57	0.649	3.377	1209
160	0.52	0.659	3.400	1204
170	0.48	0.669	3.423	1199
180	0.45	0.679	3.446	1193
190	0.42	0.689	3.469	1188
200	0.39	0.699	3.493	1183
210	0.37	0.709	3.516	1178

NuTherm HC-30 Properties



Vapor Pressure

Temperature (°C)	Temperature (°F)	Vapor Pressure (psia)
20	68	0.26
30	86	0.35
40	104	0.58
50	122	1.04
60	140	1.81
70	158	2.99
80	176	4.69
90	194	7.06
100	212	10.3
110	230	14.5
120	248	20.0
130	266	27.0
140	284	35.9
150	302	47.1
160	320	61.0
170	338	78.2
180	356	99.2
190	374	124.6
200	392	155.4
210	410	192.2
218	424	226.6

Gasket & Polymer Compatibility

Material	Compatibility
Nitrile / NBR	Excellent to 150°F, Good above 150°F
Hydrogenated Nitrile / HNBR	Excellent
Ethylene Propylene / EP, EPDM	Excellent
Chloropropene	Good
Isobutylene / IIR Latex	Good
Synthetic Isoprene / NR (Natural Rubber)	Good / Excellent
Natural Isoprene / NR (Natural Rubber)	Good / Excellent
Chemraz Kalrez / FFKM	Excellent
PTEF / FEP (Teflon)	Excellent
Gylon Style 3500,3504, 3510	Excellent
Nylon / Polyamide	Good / Excellent
Polyvinyl Chloride / PVC	Good / Excellent
Polyethylene	Excellent
Polypropylene	Excellent
Epoxy	Good / Excellent
Graphite	Excellent

Metals Compatibility (Closed System)

Material	Compatibility
Aluminium*	Compatible
Cast Steel	Compatible
Monel	Compatible
Brass	Compatible
Copper	Compatible
Nickel	Compatible
Bronze	Compatible
Hastelloy	Compatible
Stainless Steel	Compatible
Carbon Steel	Compatible
Inconel	Compatible
Tantalum	Compatible
Cast Iron*	Compatible
Incoloy 825	Compatible
Titanium	Compatible
Ti6Al4V	Compatible
Zinc**	Incompatible
Zinc Plating**	Incompatible
Galvanized Surfaces**	Incompatible
Magnesium**	Incompatible

*Recommended for use only in closed, airtight systems that have been purged with an inert gas, such as Nitrogen, in the headspace.

**May be used for support framing, electrical conduit, and structural components. If product spills or splashes on any metals, rinse immediately with water to prevent surface discoloration.